


Hydraulic 2-Ram-Lift

Type: JAB TwinRam 35 AE/1300

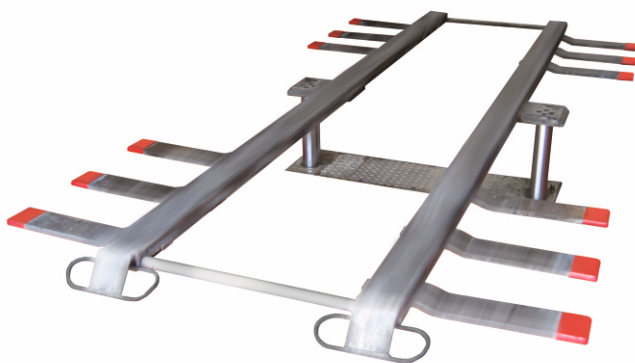

The electro-hydraulic 2-ram lift is equipped with the proved „Essmann-Technology“. Drive-on ramps are not necessary as the vehicles can be lifted with the 20 mm flat spring plates.

Therefore the underside of the vehicle is easily accessible. The vehicle centers itself and it is auto-protected against roll-away. The TwinRam 35 AE is specially suitable for service reception.

This unique carrier bridge „System Essmann“ is manufactured by JAB only! Fast, easy and safe lifting of vehicles is a big advantage of this solution. Drive-on - Lift up - Work!

This lift is also available with a ram distance of 2.300 mm as TwinRam 35AE/2300.

Technical Data

Type	TwinRam 35 AE/1300	TwinRam 35 AE/2300
Lifting capacity	3.500 kg	3.500 kg
Ram distance	1.300 mm	2.300 mm
Effective stroke	1.900 mm	1.900 mm
Lifting time approx.	30 sec.	30 sec.
Electric motor	2 kW	2 kW
Oil filling	10 ltr.	10 ltr.

JAB-Advantages:

- Low drive-on height of 20 mm
- No recessed version necessary
- Immediate lifting without set-up time
- Hot dip galvanized as standard
- Chromium plated piston bars are abrasive-free and totally sealed
- Reception of all passenger cars and small trucks
- All force is taken up by the installation frame and led into the ground
- Foundation cassette seal welded for installation into water protected area
- Environmental friendly through low oil quantity and use of bio-degradable hydraulic oil (upon request)
- Many accessories available for all demands
- Easy to maintain through best possible accessibility
- Highest quality and huge life span
- Advice, after-sales and maintenance - all through JAB

In case you need any further information, please don't hesitate to contact us!

JAB — Made in Germany




J.A. Becker & Söhne GmbH & Co KG
Postfach 1151 · D-74148 Neckarsulm
Telephone +49 (0) 7132 367-0 · Telefax +49 (0) 7132 367-289
E-Mail: info@jab-becker.de / www.jab-becker.de



Detailed dimensions

Type: JAB TwinRam 35 AE/1300

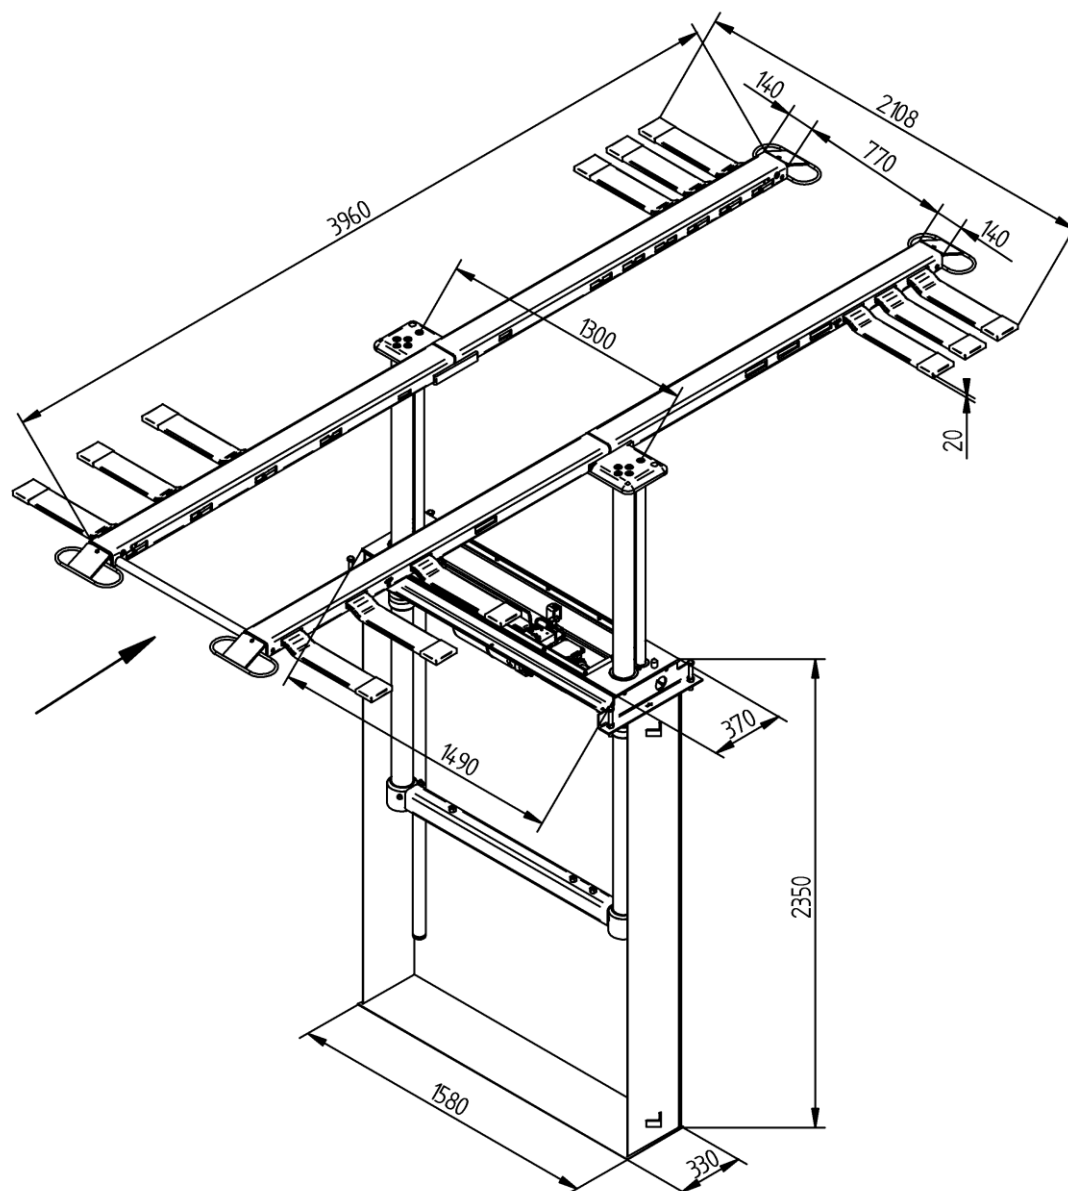

Technical changes and modifications reserved!
Several executions available!



J.A. Becker & Söhne GmbH & Co KG
Postfach 1151 · D-74148 Neckarsulm
Telephone +49 (0) 7132 367-0 · Telefax +49 (0) 7132 367-289
E-Mail: info@jab-becker.de / www.jab-becker.de



02/2018